

USP


- Dual range sensor for larger dynamic range

Typical Applications


- Battery Management Systems
- Inverter / Integrated Belt Starter Generator (iBSG)

IMC Hall® versions




Low Field (LF)





High Field (HF)



Very High Field (VHF)

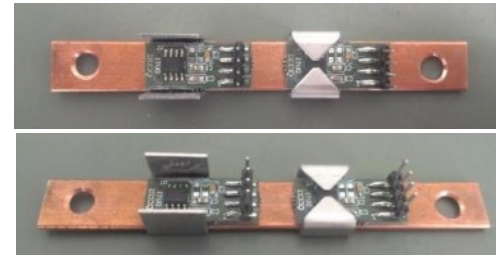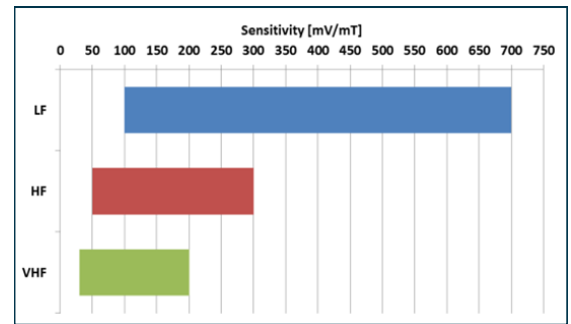

Dual range 75A/350A in U12 shield

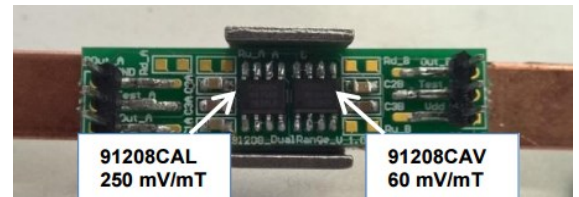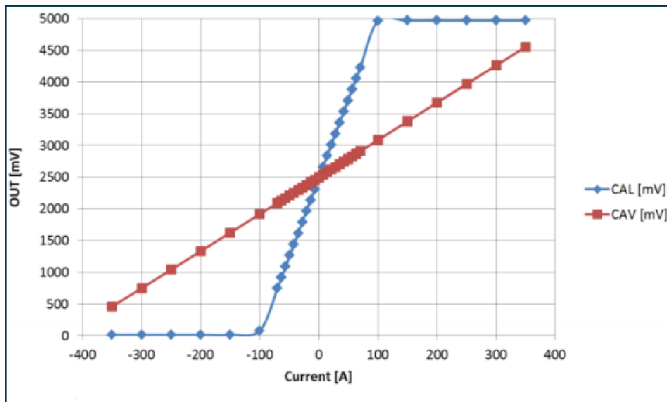

Resolution [75A – 350A] (91208CAV): 1.75 A
Resolution [0A – 75A] (91208CAL): 0.35 A

Dual range 100A/1000A in U25 shield

